



**4005.CONSLD**

CONSLIDE RANGE

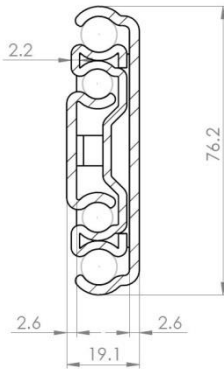

Options: Various dimensions of the main profile, slide lengths, extensions, drillings and hole centres to customer requirements

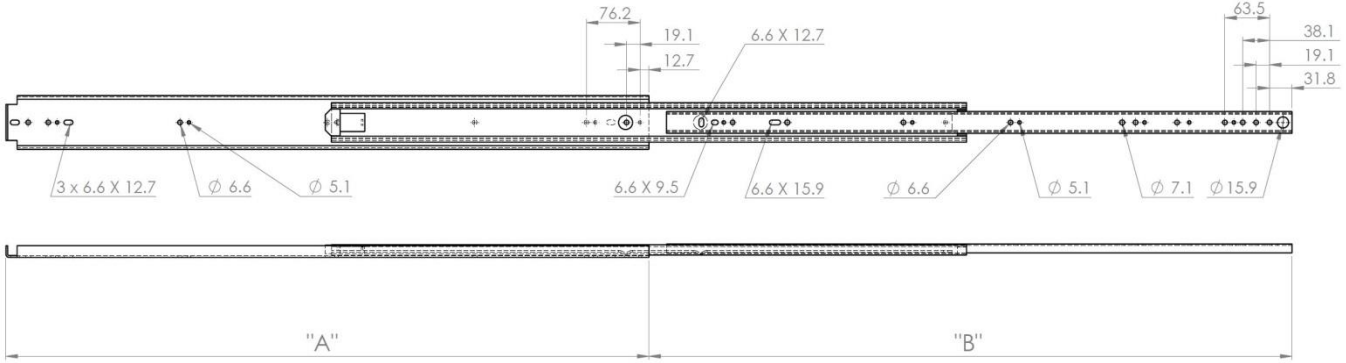

We recommend use the major axis, do not dismantle the slide! The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam.

Configuration Table					
Part Number	Installation Length "A"		Extension Length "B"		Load Per Pair (kg)
	inch	mm	inch	mm	
4005.CONSLD.008	8"	203	8"	203	130
4005.CONSLD.010	10"	254	10"	254	130
4005.CONSLD.012	12"	305	12"	305	130
4005.CONSLD.014	14"	356	14"	356	180
4005.CONSLD.016	16"	406	16"	406	250
4005.CONSLD.018	18"	457	18"	457	250
4005.CONSLD.020	20"	508	20"	508	250
4005.CONSLD.022	22"	559	22"	559	250
4005.CONSLD.024	24"	610	24"	610	250
4005.CONSLD.026	26"	660	26"	660	250
4005.CONSLD.028	28"	711	28"	711	250
4005.CONSLD.030	30"	762	30"	762	230
4005.CONSLD.032	32"	813	32"	813	230
4005.CONSLD.034	34"	864	34"	864	230
4005.CONSLD.036	36"	914	36"	914	230
4005.CONSLD.038	38"	965	38"	965	230
4005.CONSLD.040	40"	1016	40"	1016	230
4005.CONSLD.042	42"	1067	42"	1067	230
4005.CONSLD.044	44"	1118	44"	1118	200
4005.CONSLD.046	46"	1168	46"	1168	200
4005.CONSLD.048	48"	1219	48"	1219	200
4005.CONSLD.050	50"	1270	50"	1270	200
4005.CONSLD.052	52"	1321	52"	1321	200
4005.CONSLD.054	54"	1372	54"	1372	200
4005.CONSLD.056	56"	1422	56"	1422	200
4005.CONSLD.058	58"	1473	58"	1473	200
4005.CONSLD.060	60"	1524	60"	1524	200

**Material:** Beams – rolled steel. Ball cages - pressed steel. Bearings - chromed steel. Plating is bright zinc chromate as standard, with an optional black passivation (subject to MOQ).  
**Designation:** NEN - EN 12329-Fe/Zn5/F/T2. Layer thickness: Average 5µm. Corrosion resistance: Minimum 120 hours neutral salt spray (ISO-9227/ASTM- B 117) before zinc corrosion (white) occurs. ROHS compliant.

*'UK Company, Global Reach'*