



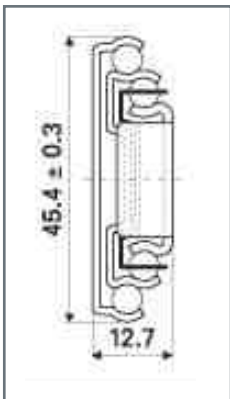

### 4608

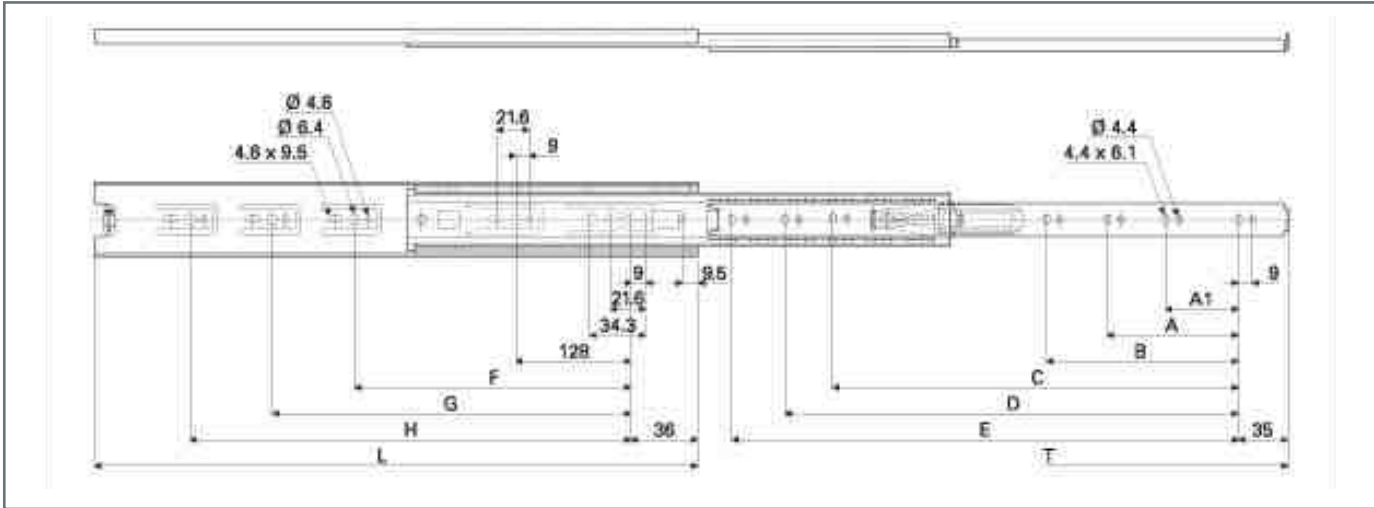

Type:4608				Part Number: 4010.4608.####									
Part Number	Installation length L (mm)	Extension Length D (mm)	Load Per Pair (kg)	Drilling Table (mm)									
				A1	A	B	C	D	E	F	G	H	
4010.4608.0250	250	250	31						192	224			
4010.4608.0300	300	300	50						242	224			
4010.4608.0350	350	350	50						292	224	320		
4010.4608.0400	400	400	50			320			342	224	352		
4010.4608.0450	450	450	47	128		320			392	224	416		
4010.4608.0500	500	500	45	128		352			442	224	352		
4010.4608.0550	550	550	42	128			416		492	224	352	448	
4010.4608.0600	600	600	40	128			416		542	224	352	480	
4010.4608.0650	650	650	38	128	224		416	544	592	224	352	544	
4010.4608.0700	700	700	33	128	224		448	544	642	224	352	544	

\*\*The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam.

#### FEATURES

- Soft bumper with hold closed function
- Disconnect of inner profile
- Side space adjustable tabs
- 32 mm hole pattern
- Low profile
- Zinc plated (blue)
- Load capacity 45 kg / 99 lbs based upon 500mm at 50000 cycles



Options: Various Dimensions of the main profile, optional slide lengths, extensions, drillings, diameters and hole centres to customer's requirements.

WE RECOMMEND USE ON THE MAJOR AXIS DO NOT DISMANTLE THE SLIDE!