



**1018**

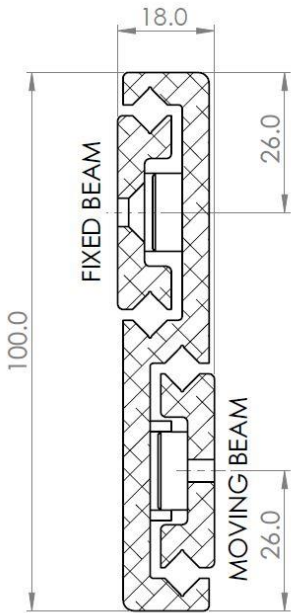

**Mounting details**  
Refer to drill table hole pitches

Configuration Table					
Part Number	Installation Length "L"	Extension Length "C"	Load Per Pair (kg)	Drill Table	
				"A"	"B"
4013.1018.0300	300	305	65	130	3
4013.1018.0350	350	405	59	155	3
4013.1018.0400	400	505	55	120	4
4013.1018.0450	450	465	78	136.5	4
4013.1018.0500	500	565	73	115	5
4013.1018.0550	550	665	57	127.5	5
4013.1018.0600	600	765	55	140	5
4013.1018.0650	650	585	65	122	6
4013.1018.0700	700	685	72	132	6
4013.1018.0750	750	785	52	142	6
4013.1018.0800	800	885	46	152	6
4013.1018.0850	850	845	39	162	6
4013.1018.0900	900	945	33	172	6
4013.1018.0950	950	1045	26	182	6
4013.1018.1000	1000	1145	20	192	6

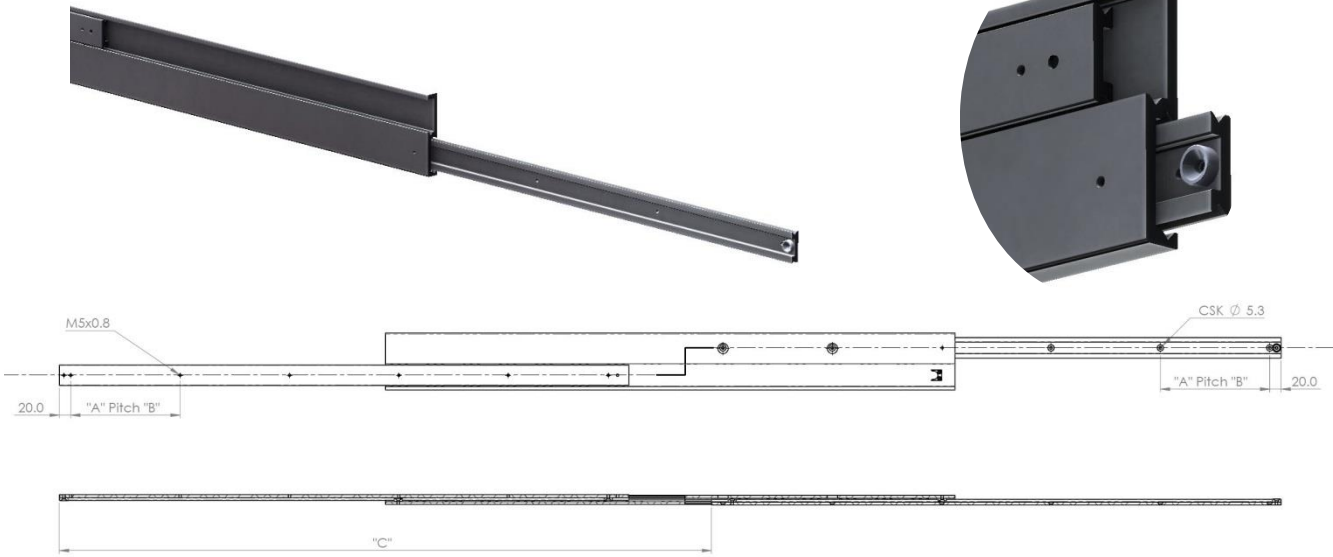

We recommend use the major axis, do not dismantle the slide! The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam.

- Anodised aluminium 6005A milled ball race for accuracy
- Caged cross roller bearings for smooth, deflection free extension
- Unique design eliminates brinelling/bearing indentation on the raceways
- Standard lengths and extensions 300-1000mm
- Special lengths, drillings and surface finish upon request
- Silent, lightweight and corrosion resistant

*'UK Company, Global Reach'*