DDTS110

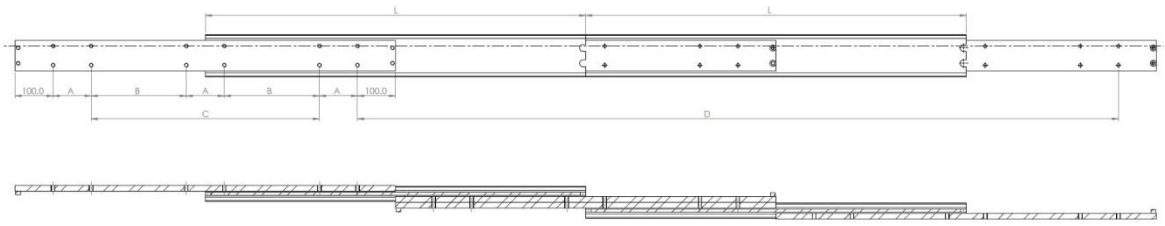

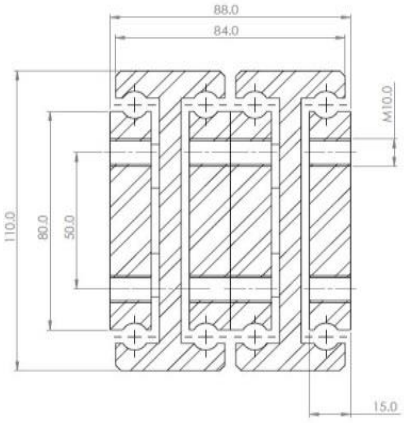

Mounting details
Refer to drill table hole pitches

Configuration Table						
Part Number	Installation Length "L"	Extension Length "D"	Load Per Pair (kg)	Drill Table		
				"A"	"B"	"C"
4015.DDTS110.0300	300	600	1120	100		
4015.DDTS110.0350	350	700	1110	50		50
4015.DDTS110.0400	400	800	1100	50		100
4015.DDTS110.0450	450	900	1090	50		150
4015.DDTS110.0500	500	1000	1080	50		200
4015.DDTS110.0550	550	1100	1060	50		250
4015.DDTS110.0600	600	1200	1040	50		300
4015.DDTS110.0650	650	1300	1020	50	150	
4015.DDTS110.0700	700	1400	1000	50	175	
4015.DDTS110.0750	750	1500	980	50	200	
4015.DDTS110.0800	800	1600	960	100	150	
4015.DDTS110.0850	850	1700	920	100	175	
4015.DDTS110.0900	900	1800	880	100	200	
4015.DDTS110.0950	950	1900	840	100	225	
4015.DDTS110.1000	1000	2000	800	100	250	
4015.DDTS110.1050	1050	2100	760	100	275	
4015.DDTS110.1100	1100	2200	700	100	300	
4015.DDTS110.1150	1150	2300	680	100	325	
4015.DDTS110.1200	1200	2400	620	100	350	

We recommend use the major axis, do not dismantle the slide! The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam.

Options: Various dimensions of the main profile, slide lengths, extensions, drillings and hole centres to customer requirements

Material: All steel parts
Beams: C45 E+C carbon steel. Cold drawn with milled raceways.
Ball cages: Sheet steel End Bolts: ASTM A307
Steel surface protection: Zinc & passivated - 10-12 micron µ
Ball bearings: Chromed C85, G100: DIN 5401 (Option SS 316L)
Maximum temperature: We recommend is 250°C with high-temp lubrication and free movement to allow for steel expansion.

Unit 9, Gledrid Industrial Park, Chirk, Wrexham, LL14 5DG / Tel: +44 (0)1691 770303 / Fax: +44 (0)1691 776900 / Email: info@gsfslides.com

'UK Company, Global Reach '

DDTS110

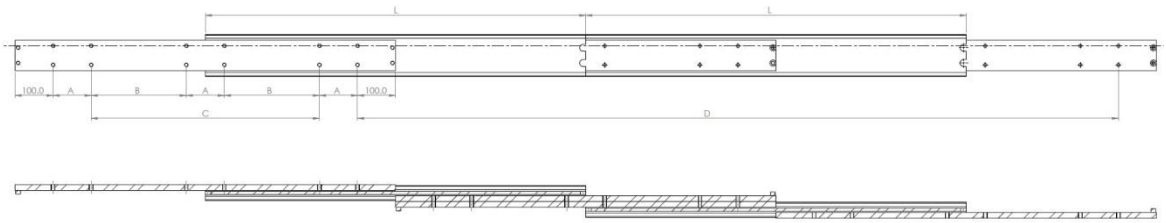

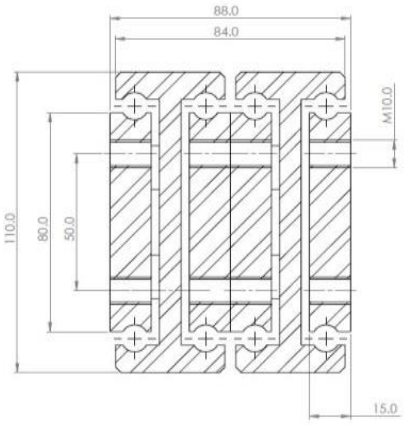

Mounting details
Refer to drill table hole pitches

Configuration Table						
Part Number	Installation Length "L"	Extension Length "D"	Load Per Pair (kg)	Drill Table		
				"A"	"B"	"C"
4015.DDTS110.1250	1250	2500	600	100	375	
4015.DDTS110.1300	1300	2600	570	100	400	
4015.DDTS110.1350	1350	2700	560	100	425	
4015.DDTS110.1400	1400	2800	540	100	450	
4015.DDTS110.1450	1450	2900	520	100	475	
4015.DDTS110.1500	1500	3000	495	100	500	
4015.DDTS110.1550	1550	3100	480	100	525	
4015.DDTS110.1600	1600	3200	460	100	550	
4015.DDTS110.1650	1650	3300	440	100	575	
4015.DDTS110.1700	1700	3400	410	100	600	
4015.DDTS110.1750	1750	3500	400	100	625	
4015.DDTS110.1800	1800	3600	385	100	650	
4015.DDTS110.1850	1850	3700	360	100	675	
4015.DDTS110.1900	1900	3800	330	100	700	
4015.DDTS110.1950	1950	3900	320	100	725	
4015.DDTS110.2000	2000	4000	300	100	750	

APPROACHABLE ac REGISTERED UKAS MANAGEMENT SYSTEMS 8320

We recommend use the major axis, do not dismantle the slide! The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam.

Options: Various dimensions of the main profile, slide lengths, extensions, drillings and hole centres to customer requirements

Material: All steel parts
Beams: C45 E+C carbon steel. Cold drawn with milled raceways.
Ball cages: Sheet steel End Bolts: ASTM A307
Steel surface protection: Zinc & passivated - 10-12 micron µ
Ball bearings: Chromed C85, G100: DIN 5401 (Option SS 316L)
Maximum temperature: We recommend is 250°C with high-temp lubrication and free movement to allow for steel expansion.5401

Unit 9, Gledrid Industrial Park, Chirk, Wrexham, LL14 5DG / Tel: +44 (0)1691 770303 / Fax: +44 (0)1691 776900 / Email: info@gsfslides.com