FR 7101 SCC

SLIDE TYPE:	**Full-Extension Drawer Slide - Progressive-Action**
MOUNTING:	Side Mount

WIDTH:	**24 mm**
LOAD CAPACITY:	dynamic up to **120 kg** (full-ext.) dynamic up to **105 kg** (over-ext.)

MATERIAL:	stainless steel 1.4509 (SCC)

FEATURES:	solid delrin* rollers

SPECIFICATIONS & NOTES:

- cabinet profile with holes for welding and drawer profile without holes for welding
- high lateral stability through specially formed middle profile and guide rollers
- ideal running characteristic and smoothness of running through integrated progressive-action
- safety clip mounted in middle profile
- double-sided captive profile
- self closing, soft stop

ⓘ also available with 60 mm over-extension

ⓘ on request, also available as heat resistant model (up to 110° C) – load capacity 90 kg (full-ext.), 80 kg (over-ext.)

*DuPont (TM) Delrin®

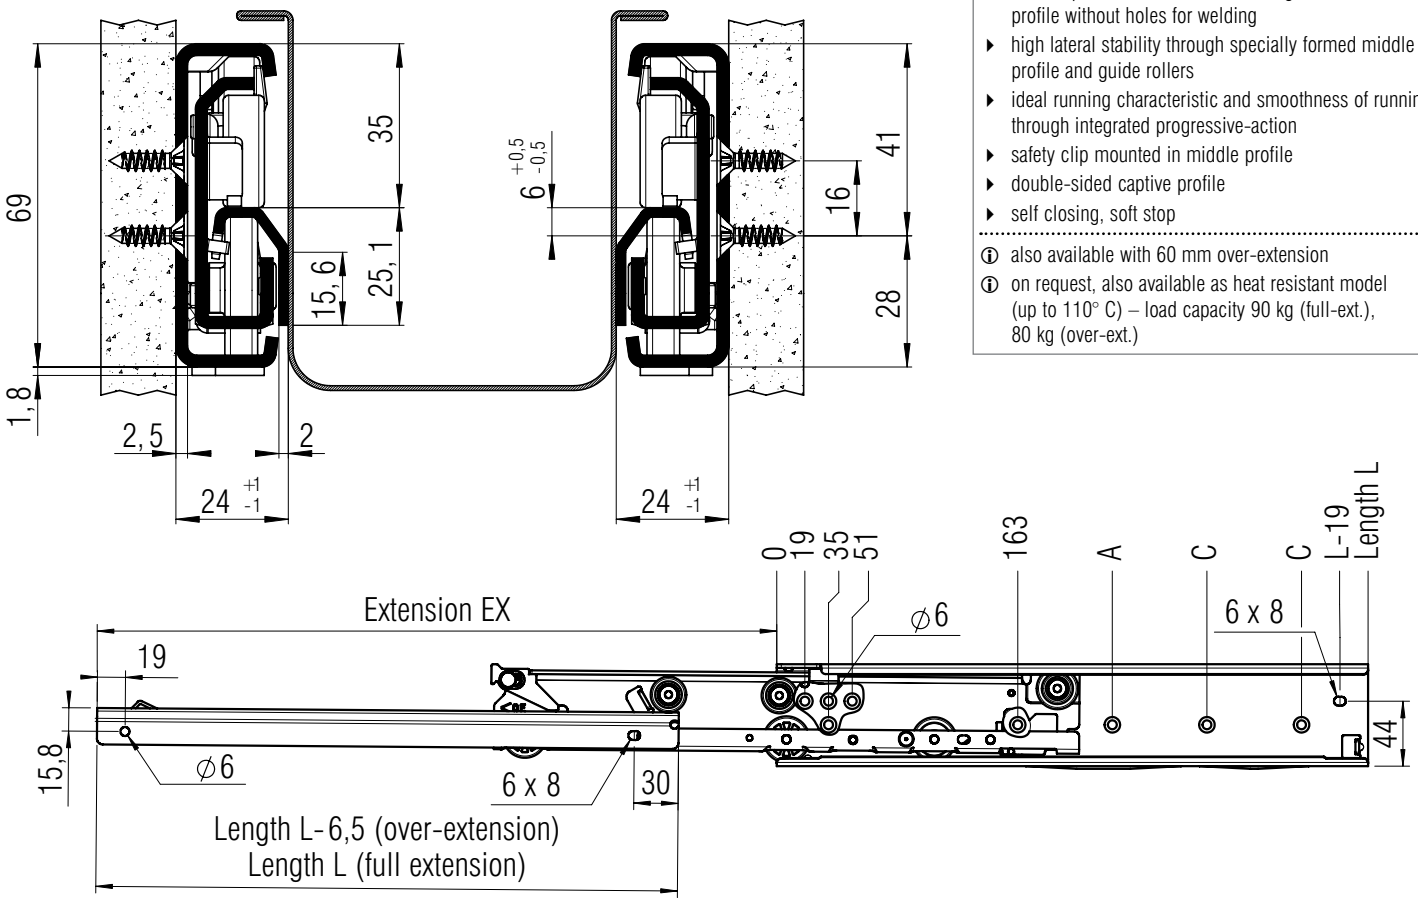

screw holes for 4,5 mm spax screws

L mm	EX full-ext.	EX over-ext.	A mm	B mm	C mm	Weight per pair (kg)	Order No. full-ext.	Order No. over-ext.
400	385	460	323			3,44	▸ **7110**	*
450	435	510	355			3,88	▸ **7111**	*
500	485	560	291	451		4,32	▸ **7112**	▸ **7122**
550	535	610	323	483		4,76	▸ **7113**	▸ **7123**
600	585	660	355	547		5,20	▸ **7114**	▸ **7124**
650	635	710	355	611		5,64	▸ **7115**	*
700	685	760	355	515	643	6,08	▸ **7116**	*
750	735	810	355	547	675	6,52	▸ **7117**	*

Packing Unit: **4 sets per box** ▸ **prompt delivery** * **minimum order quantity and lead time on request!**

SLIDING SYSTEMS
Fulterer
Unit 9, Gledrid Industrial Park, Chirk, Wrexham, UK, LL14 5DG / Tel: +44 (0)1691 770303 / Fax: +44 (0)1691 776900 / Email: info@gsfslides.com