
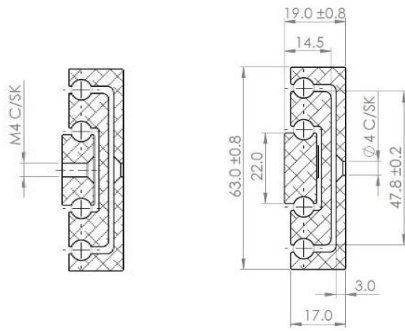


**4014.220 S**

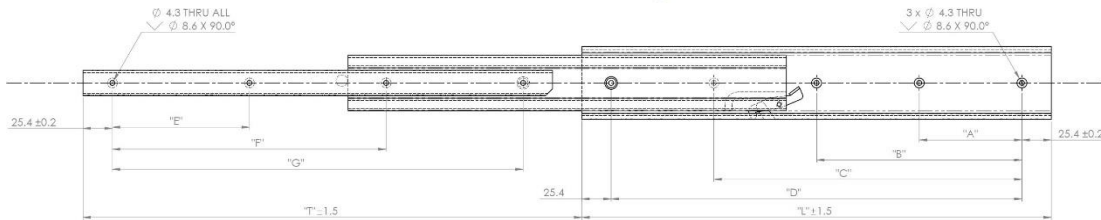

**Mounting details**  
Refer to drill table hole pitches

**Features:**  
**Sequential Beam Extension (S)**  
**Option: Lock Out (FL-EN)**

Configuration Table												
Part Number	Installation Length "L"	Extension Length "T"	Drill Table							Weight (KG/Each)	QTY/BOX	Load (KG/Pair)
			"A"	"B"	"C"	"D"	"E"	"F"	"G"			
4014.220S.012	304.8	330.2	127	-	-	254	84	169.4	254	0.72	10	101
4014.220S.014	355.6	381	152.4	-	-	304.8	101.6	203.2	304.8	0.84	10	103
4014.220S.016	406.4	431.8	88.9	177.8	266.7	355.6	118.6	237	355.6	0.96	10	108
4014.220S.018	457.2	482.6	101.6	203.2	304.8	406.4	135.4	271	406.4	1.08	10	113
4014.220S.020	508	533.4	114.3	228.6	342.9	457.2	152.4	304.8	457.2	1.2	10	116
4014.220S.022	558.8	584.2	127	254	381	508	169.4	338.6	508	1.32	10	116
4014.220S.024	609.6	635	139.7	279.4	419.1	558.8	186.2	372.6	558.8	1.44	10	113
4014.220S.026	660.4	685.8	152.4	304.8	457.2	609.6	203.2	406.4	609.6	1.56	10	105
4014.220S.028	711.2	736.6	165.1	330.2	495.3	660.4	220.2	440.2	660.4	1.68	10	97
4014.220S.030	762	787.4	177.8	355.6	533.4	711.2	237	474.2	711.2	1.8	10	91
4014.220S.032	812.8	838.2	190.5	381	571.5	762	254	508	762	1.92	10	86
4014.220S.034	863.6	889	203.2	406.4	609.6	812.8	271	541.8	812.8	2.04	7	83
4014.220S.036	914.4	939.8	215.9	431.8	647.7	863.6	287.9	575.7	863.6	2.16	7	81

Options: Various dimensions of the main profile, slide lengths, extensions, drillings and hole centres to customer requirements



We recommend use the major axis, do not dismantle the slide! The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam.

**Material:**

- Beams: Automotive grade aluminium 7N01 T5. Clear anodised
- Ball bearings: Hardened steel & chromed.
- Cages: Plated steel Caged ball bearings for smooth extension
- Standard surface finish meets MIL-A-8625 Type II
- Silent & light weight: 30% the weight of steel slides