# 4014.250 S

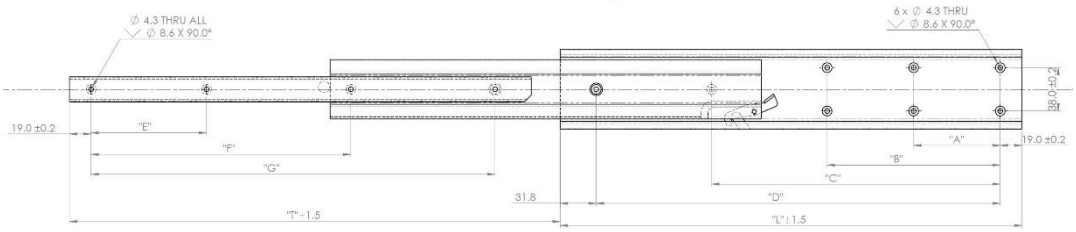


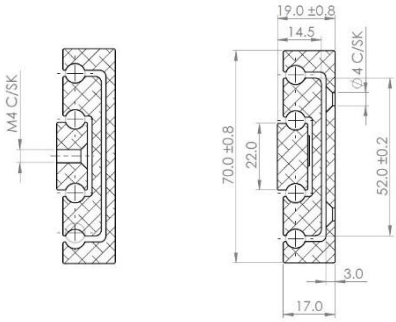


Mounting details
Refer to drill table hole pitches

**Features:**
**Sequential Beam Extension (S)**
**Option: Lock Out (FL-EN)**

| Configuration Table | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Part Number | Installation Length "L" | Extension Length "T" | Drill Table | | | | | | | Weight (KG/Each) | QTY/ BOX | Load (KG/Pair) |
| | | | "A" | "B" | "C" | "D" | "E" | "F" | "G" | | | |
| 4014.250S.012 | 304.8 | 330.2 | 98 | - | - | 254 | 50.8 | 177.8 | 254 | 0.84 | 10 | 104 |
| 4014.250S.014 | 355.6 | 381 | 127 | - | - | 304.8 | 76.2 | 203.2 | 304.8 | 0.98 | 10 | 106 |
| 4014.250S.016 | 406.4 | 431.8 | 76.2 | 152.4 | 254 | 355.6 | 101.6 | 228.6 | 355.6 | 1.12 | 10 | 110 |
| 4014.250S.018 | 457.2 | 482.6 | 76.2 | 152.4 | 279.4 | 406.4 | 127 | 279.4 | 406.4 | 1.26 | 10 | 115 |
| 4014.250S.020 | 508 | 533.4 | 98 | 203.2 | 330.2 | 457.2 | 152.4 | 304.8 | 457.2 | 1.4 | 10 | 118 |
| 4014.250S.022 | 558.8 | 584.2 | 98 | 203.2 | 355.6 | 508 | 177.8 | 330.2 | 508 | 1.54 | 10 | 118 |
| 4014.250S.024 | 609.6 | 635 | 127 | 254 | 406.4 | 558.8 | 177.8 | 381 | 558.8 | 1.68 | 10 | 116 |
| 4014.250S.026 | 660.4 | 685.8 | 127 | 254 | 431.8 | 609.6 | 203.2 | 406.4 | 609.6 | 1.82 | 10 | 108 |
| 4014.250S.028 | 711.2 | 736.6 | 152.4 | 304.8 | 482.6 | 660.4 | 228.6 | 431.8 | 660.4 | 1.96 | 10 | 100 |
| 4014.250S.030 | 762 | 787.4 | 152.4 | 304.8 | 508 | 711.2 | 228.6 | 482.6 | 711.2 | 2.1 | 10 | 94 |
| 4014.250S.032 | 812.8 | 838.2 | 177.8 | 355.6 | 558.8 | 762 | 254 | 508 | 762 | 2.24 | 10 | 90 |
| 4014.250S.034 | 863.6 | 889 | 177.8 | 355.6 | 584.2 | 812.8 | 279.4 | 533.4 | 812.8 | 2.38 | 7 | 87 |
| 4014.250S.036 | 914.4 | 939.8 | 203.2 | 406.4 | 635 | 863.6 | 279.4 | 584.2 | 863.6 | 2.52 | 7 | 85 |

Options: Various dimensions of the main profile, slide lengths, extensions, drillings and hole centres to customer requirements

We recommend use the major axis, do not dismantle the slide! The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam.

**Material:**
Beams: Automotive grade aluminium 7N01 T5. Clear anodised
Ball bearings: Hardened steel & chromed.
Cages: Plated steel Caged ball bearings for smooth extension
Standard surface finish meets MIL-A-8625 Type II
Silent & light weight: 30% the weight of steel slides



Unit 9, Gledrid Industrial Park, Chirk, Wrexham, LL14 5DG / Tel: +44 (0)1691 770303 / Fax: +44 (0)1691 776900 / Email: info@gsfslides.com