



**4005.CONTOOL - Flat & Side Mount**

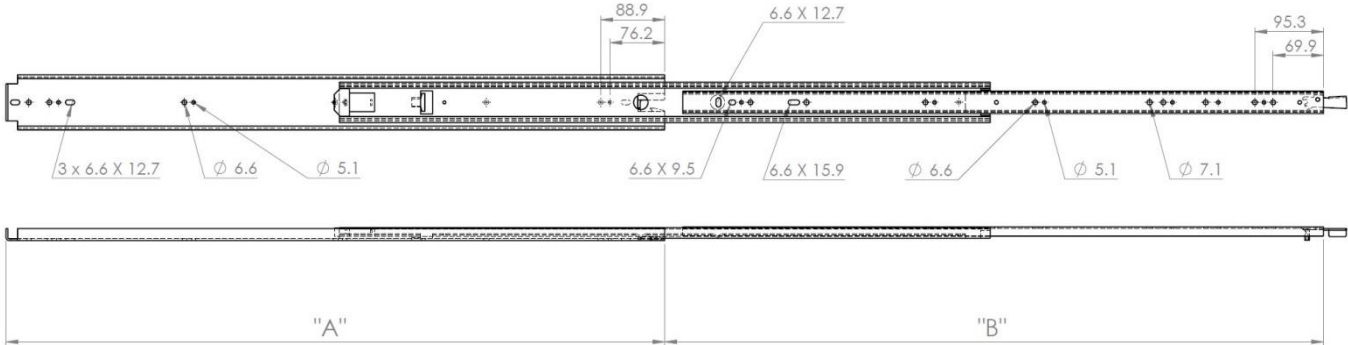

For standard mounting, this is a 227kg class slide. Please refer to CONRED datasheet for loadings

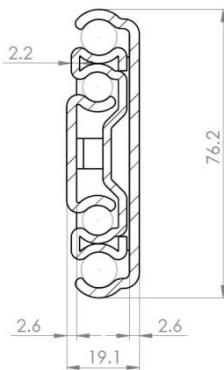

Options: Various dimensions of the main profile, slide lengths, extensions, drillings and hole centres to customer requirements



We recommend use the major axis, do not dismantle the slide! The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam.

Part Number	Configuration Table				Load Per Pair Flat Mount (kg)
	Installation Length "A"		Extension Length "B"		
	inch	mm	11	mm	
4005.CONTOOL.014	14"	356	14"	356	43
4005.CONTOOL.016	16"	406	16"	406	43
4005.CONTOOL.018	18"	457	18"	457	50
4005.CONTOOL.020	20"	508	20"	508	50
4005.CONTOOL.022	22"	559	22"	559	60
4005.CONTOOL.024	24"	610	24"	610	60
4005.CONTOOL.026	26"	660	26"	660	60
4005.CONTOOL.028	28"	711	28"	711	60
4005.CONTOOL.030	30"	762	30"	762	55
4005.CONTOOL.032	32"	813	32"	813	55
4005.CONTOOL.034	34"	864	34"	864	55
4005.CONTOOL.036	36"	914	36"	914	55
4005.CONTOOL.038	38"	965	38"	965	55
4005.CONTOOL.040	40"	1016	40"	1016	48
4005.CONTOOL.042	42"	1067	42"	1067	48
4005.CONTOOL.044	44"	1118	44"	1118	48
4005.CONTOOL.046	46"	1168	46"	1168	48
4005.CONTOOL.048	48"	1219	48"	1219	40
4005.CONTOOL.050	50"	1270	50"	1270	40
4005.CONTOOL.052	52"	1321	52"	1321	40
4005.CONTOOL.054	54"	1372	54"	1372	32
4005.CONTOOL.056	56"	1422	56"	1422	32
4005.CONTOOL.058	58"	1473	58"	1473	32
4005.CONTOOL.060	60"	1524	60"	1524	32

**Material:** Beams – rolled steel. Ball cages - pressed steel. Bearings - chromed steel. Plating is bright zinc chromate as standard passivation. Ball strips, buffers & latch cover: Nylon  
**Designation:** NEN - EN 12329-Fe/Zn5/F/T2. Layer thickness: Average 5µm. Corrosion resistance: Minimum 120 hours neutral salt spray (ISO-9227/ASTM- B 117) before zinc corrosion (white) occurs. ROHS compliant.

*'UK Company, Global Reach'*