



CONQUAD

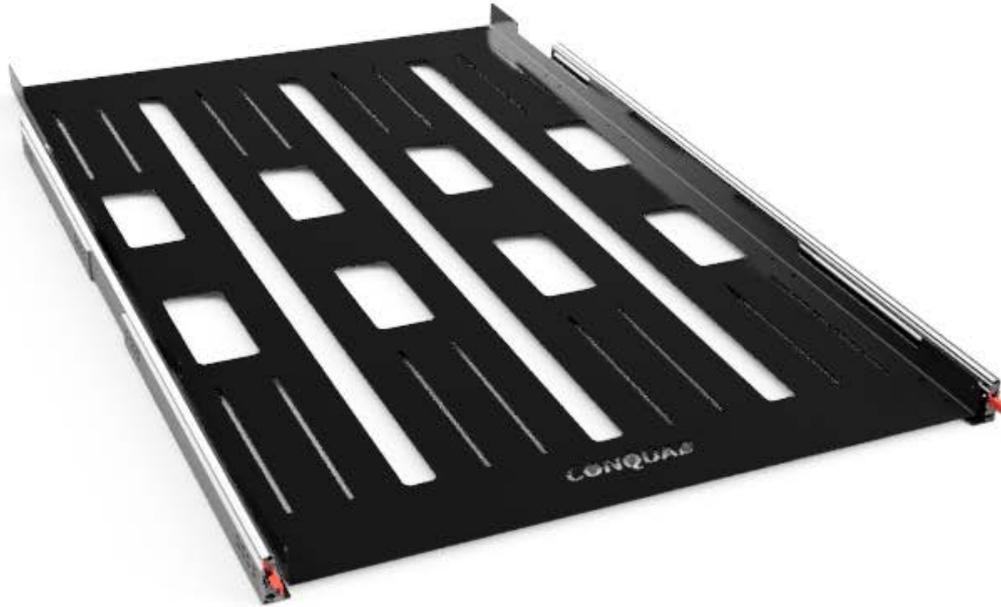

CONQUAD

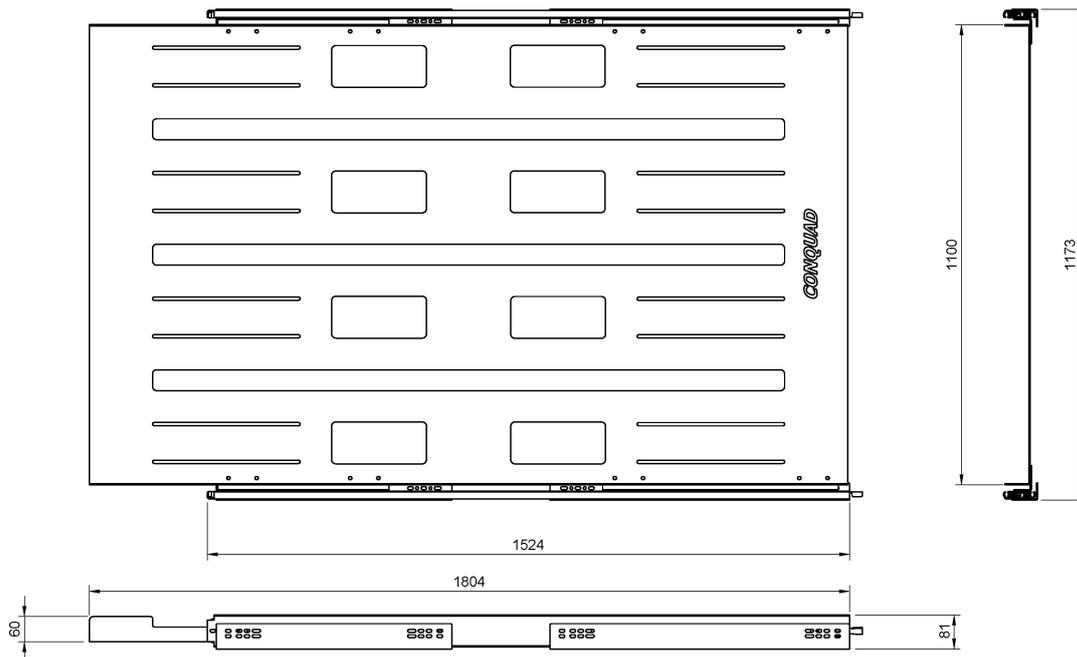

We recommend use the major axis, do not dismantle the slide! The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam.


Material:

Tray - Folded sheet steel, with black powder coated finish
Beams – rolled steel. Ball cages - pressed steel. Bearings - chromed steel.
Plating is bright zinc chromate as standard.

Designation: NEN - EN 12329-Fe/Zn5/F/T2. Layer thickness: Average 5µm.
Corrosion resistance: Minimum 120 hours neutral salt spray (ISO-9227/
ASTM- B 117) before zinc corrosion (white) occurs. ROHS compliant.

'UK Company, Global Reach'

Telescopic Slide Details

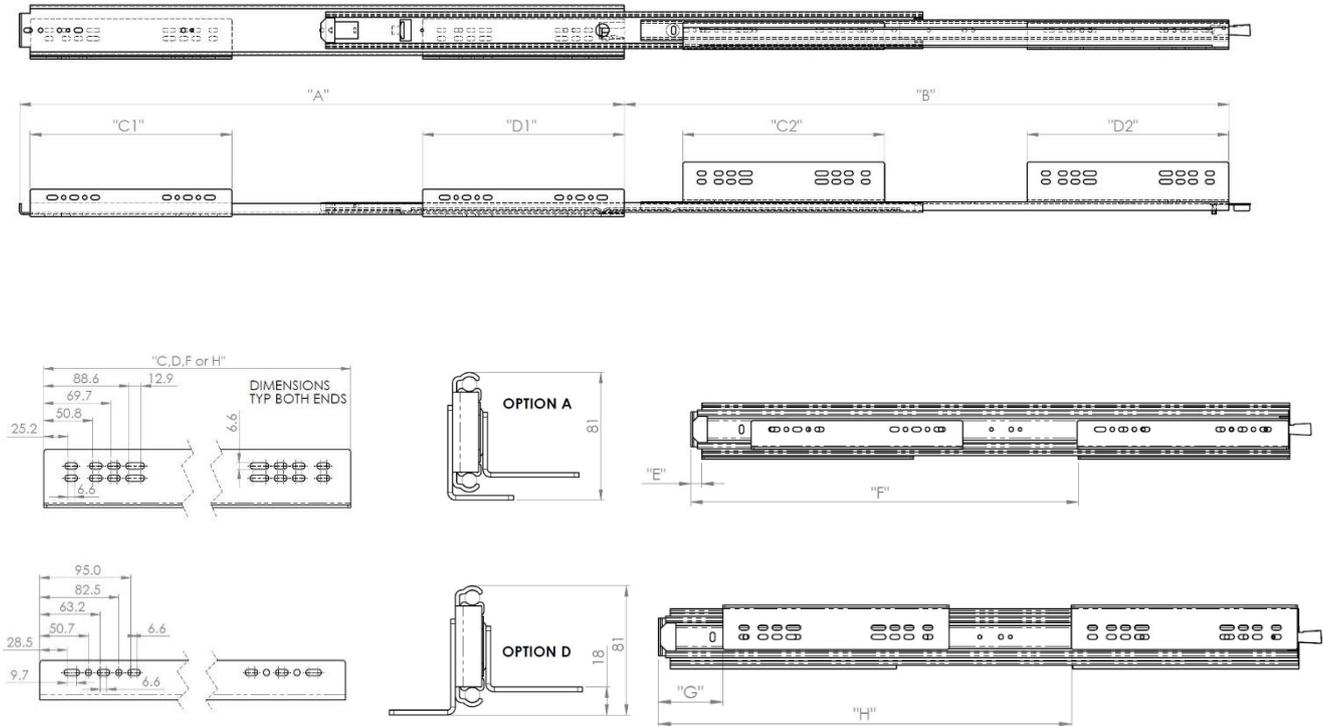

| Configuration Table | | | | | | | | | | | | | |
|--------------------------------------|-------------------------|------|----------------------|------|---------------------|------|------|------|-----|-----|-----|-----|--------------------|
| Part Number (*) = A , B , C or D | Installation Length "A" | | Extension Length "B" | | Bracket information | | | | | | | | Load Per Pair (kg) |
| | inch | mm | inch | mm | "C1" | "D1" | "C2" | "D2" | "E" | "F" | "G" | "H" | |
| 4005.CONBAS.060(*) | 60" | 1524 | 60" | 1524 | 559 | 711 | 406 | 559 | 21 | 813 | 25 | 938 | 200 |

Options: Various dimensions of the main profile, slide lengths, extensions, drillings and hole centres to customer requirements



We recommend use the major axis, do not dismantle the slide! The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam.

Material:

Tray - Folded sheet steel, with black powder coated finish
Beams – rolled steel. Ball cages - pressed steel. Bearings - chromed steel.
Plating is bright zinc chromate as standard.

Designation: NEN - EN 12329-Fe/Zn5/F/T2. Layer thickness: Average 5µm.
Corrosion resistance: Minimum 120 hours neutral salt spray (ISO-9227/ASTM- B 117) before zinc corrosion (white) occurs. ROHS compliant.

'UK Company, Global Reach '