


Full traversing is 2 x D when the slide is mounted in the open position

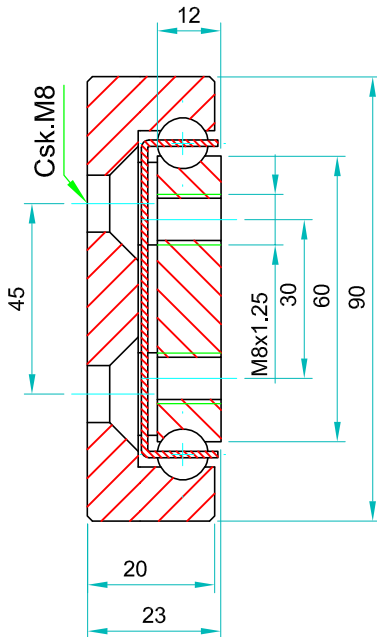

OWST-90 weighs 13.59kg/m Sold as singles				Drilling Pattern		
Part Number	Closed Length: L	Extension Length: L	Load per Pair: kg	"A"	"B"	"C"
4015.OWST090.0300	300	300	1260	50	-	100
4015.OWST090.0350	350	350	1300	50	-	150
4015.OWST090.0400	400	400	1380	50	-	200
4015.OWST090.0450	450	450	1440	50	-	250
4015.OWST090.0500	500	500	1480	50	-	300
4015.OWST090.0550	550	550	1520	50	-	350
4015.OWST090.0600	600	600	1550	50	-	400
4015.OWST090.0650	650	650	1580	50	200	-
4015.OWST090.0700	700	700	1600	50	225	-
4015.OWST090.0750	750	750	1560	50	250	-
4015.OWST090.0800	800	800	1500	50	275	-
4015.OWST090.0850	850	850	1440	50	300	-
4015.OWST090.0900	900	900	1360	50	325	-
4015.OWST090.0950	950	950	1320	50	350	-
4015.OWST090.1000	1000	1000	1240	50	375	-
4015.OWST090.1050	1050	1050	1180	50	400	-
4015.OWST090.1100	1100	1100	1100	50	425	-
4015.OWST090.1150	1150	1150	1010	50	450	-
4015.OWST090.1200	1200	1200	950	50	475	-

OWST-90 weighs 13.59kg/m Sold as singles				Drilling Pattern		
Part Number	Closed Length: L	Extension Length: L	Load per Pair: kg	"A"	"B"	"C"
4015.OWST090.1250	1250	1250	900	50	500	-
4015.OWST090.1300	1300	1300	850	50	525	-
4015.OWST090.1350	1350	1350	810	50	550	-
4015.OWST090.1400	1400	1400	780	50	575	-
4015.OWST090.1450	1450	1450	730	50	600	-
4015.OWST090.1500	1500	1500	690	50	625	-
4015.OWST090.1550	1550	1550	650	50	650	-
4015.OWST090.1600	1600	1600	630	50	675	-
4015.OWST090.1650	1650	1650	610	50	700	-
4015.OWST090.1700	1700	1700	600	100	650	-
4015.OWST090.1750	1750	1750	590	100	675	-
4015.OWST090.1800	1800	1800	580	100	700	-
4015.OWST090.1850	1850	1850	565	100	725	-
4015.OWST090.1900	1900	1900	545	100	750	-
4015.OWST090.1950	1950	1950	525	100	775	-
4015.OWST090.2000	2000	2000	510	100	800	-

Options:

- 'F' - One mounting beam countersunk
- 'FF' - Both beams countersunk
- 'SB' - Stainless steel 316L ball bearings
- 'SC' - Stainless steel ball cages
- 'SA' - Stainless end bolts & retaining pins
- 'V' - V shaped raceways (bi-directional slides)
- '70' - 70% over-extension of standard slide

**Bespoke length, drilling pattern & extension on request**

**Do not dismantle the slide!** 

The maximum safe working load is stated for a fully extended pair of slides, mounted upright. Use all fixing holes and spread the load evenly across the inner beam.

Flat mounting: Reduce the load by 60-80%.

We recommend the use of strong L brackets for under or floor mount.

Deflection is calculated at approx 1% of the closed length, at or near full load capacity.



If mounting on the indirect axis, flat, as in the image above, reduce the load capacity by 60-80% and allow for increased deflection, or contact our engineers to request accurate FEA load analysis for OEM projects. We load rate per fully extended pair of slides on the direct axis, upright, with uniform loading across the beams. If load capacities need to be increased, please contact us for technical advice.

**Material:** All steel parts/no plastics

**Beams:** Cold drawn carbon steel C45E+C. EN 10277 milled raceways

**Ball bearings:** Chromed steel C85, G100. Din 5401

**Ball cages:** Zinc plated sheet steel. Laser cut profiles

**End bolts:** Steel ASTM A307

**Surface Protection:** Electrolytic alkaline zinc coating (10-12 microns). conforming to DIN EN ISO 9227 neutral salt spray testing. No white rust appearance within 120 hours. No red rust within 1,032 hours

**Temperature range:** Steel slides -20°C to +250°C provided the necessary lubricants are applied and the beams are mounted freely to allow expansion

**Lubrication:** We apply and recommend lithium based EP3 grease for general applications. High & low temp grease upon request

**Thread pitches:** As per end profile image - coarse

