
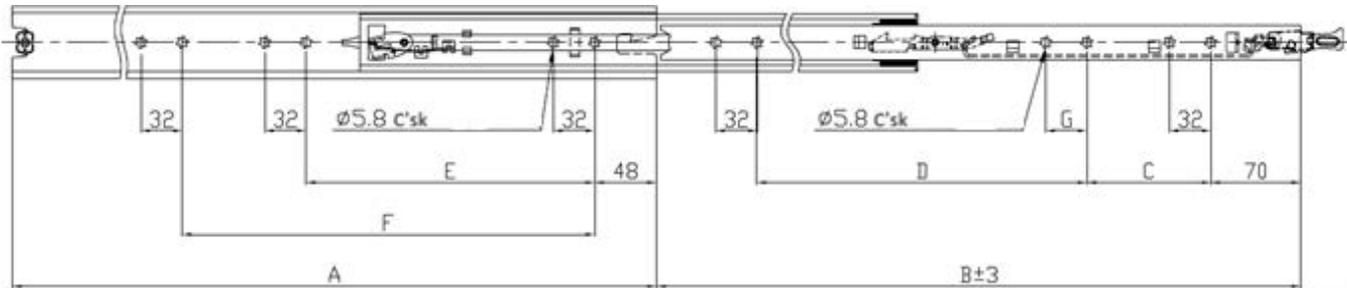


# UTILITY RED

Datasheet: 2026/1

- ⊙ Lock-in/Lock-out. Front lever release
- ⊙ Medium Duty, Full Extension
- ⊙ Up to 100kg (220lb) Load Capacity
- ⊙ No inner beam detach

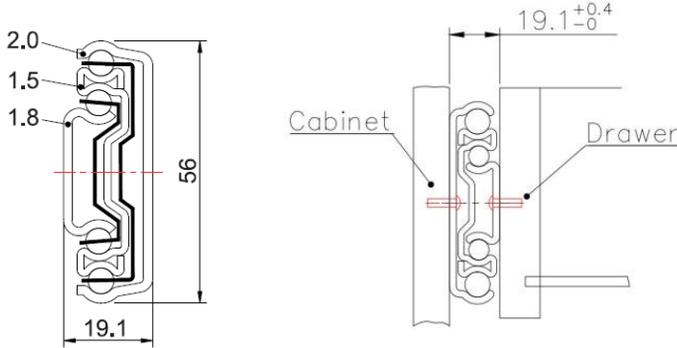


G = 32mm. If vehicle mounted, two locks must secure the load, with shock & vibration factored into the slide selection. Allow +34mm for the latch length


Item No.	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	Load/pair (kg)
4005.UTILRED-0450	450	450	96	224	192	320	100
4005.UTILRED-0500	500	500	96	256	224	384	100
4005.UTILRED-0550	550	550	128	288	256	416	100
4005.UTILRED-0600	600	600	128	320	288	480	90
4005.UTILRED-0650	650	650	160	352	288	544	90
4005.UTILRED-0700	700	700	192	352	352	576	85
4005.UTILRED-0750	750	750	224	352	352	608	85
4005.UTILRED-0800	800	800	224	416	416	672	80
4005.UTILRED-0850	850	850	224	448	448	704	80
4005.UTILRED-0900	900	900	288	448	480	768	70
4005.UTILRED-0950	950	950	320	480	480	832	70
4005.UTILRED-1000	1000	1000	352	480	512	864	70

- ⊙ **Width:** 19.1mm
- ⊙ **Height:** 56mm
- ⊙ **Installation space:** 19.1 +0.4/-0 mm
- ⊙ **Length:** 450mm to 1000mm
- ⊙ **Extension:** Full-Extension(100%)
- ⊙ **Mounting:** Side-mounting (#10 or M5 or M6 COUNTERSUNK FLAT HEAD SCREW)
- ⊙ **Loading Capacity:** 70-100kg/ 154-220lb per pair.
- ⊙ Slides side mounted in a 600mm wide drawer/upright
- ⊙ **Finish:** RoHS compliant Zinc Plated (Cr3+, up to 72 hours NSS TEST corrosion resistance, custom-made optional up to 500 hours by request)
- ⊙ Bench tested to 50,000 cycles at 450mm length: 100kg load

 If left side slide is mounted on the right side, the spring loaded locking lever can be lifted up instead. With the same effect on the opposite side.

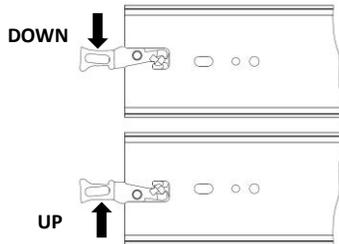

  **Maximum screw height/diameter:**



 **Component Material:**

Beams: Cold rolled steel

Ball Cages: Cold rolled steel

Ball Bearings: Chromed steel C100



***'Global Company, Global Reach'***