

# FR 6010 SCC

<b>SLIDE TYPE:</b>	Full-Extension Drawer Slide - Telescopic-Action
<b>MOUNTING:</b>	Side Mount

<b>WIDTH:</b>	15 mm
<b>LOAD CAPACITY:</b>	dynamic up to 50 kg (full-ext.)




<b>MATERIAL:</b>	stainless steel 1.4509 (SCC)
------------------	------------------------------

<b>FEATURES:</b>	chrome steel ball bearings with integrated nylon gliding ring or solid delrin* rollers
------------------	--

<b>SPECIFICATIONS &amp; NOTES:</b>
<ul style="list-style-type: none"> <li>▶ cabinet and drawer profile with screw holes</li> <li>▶ high lateral stability through specially formed middle profile</li> <li>▶ middle profile with locking device for easy assembly</li> <li>▶ with over-extension of at least 30 mm (standard)</li> <li>▶ double-sided captive profile</li> <li>▶ self-closing</li> <li>▶ soft stop</li> </ul>
<p>① compatible with regular-extension drawer slides FR 1051 SCC</p> <p>② on request, also available in a heat resistant version for -40 to +210 °C</p>

\*DuPont (TM) Delrin®

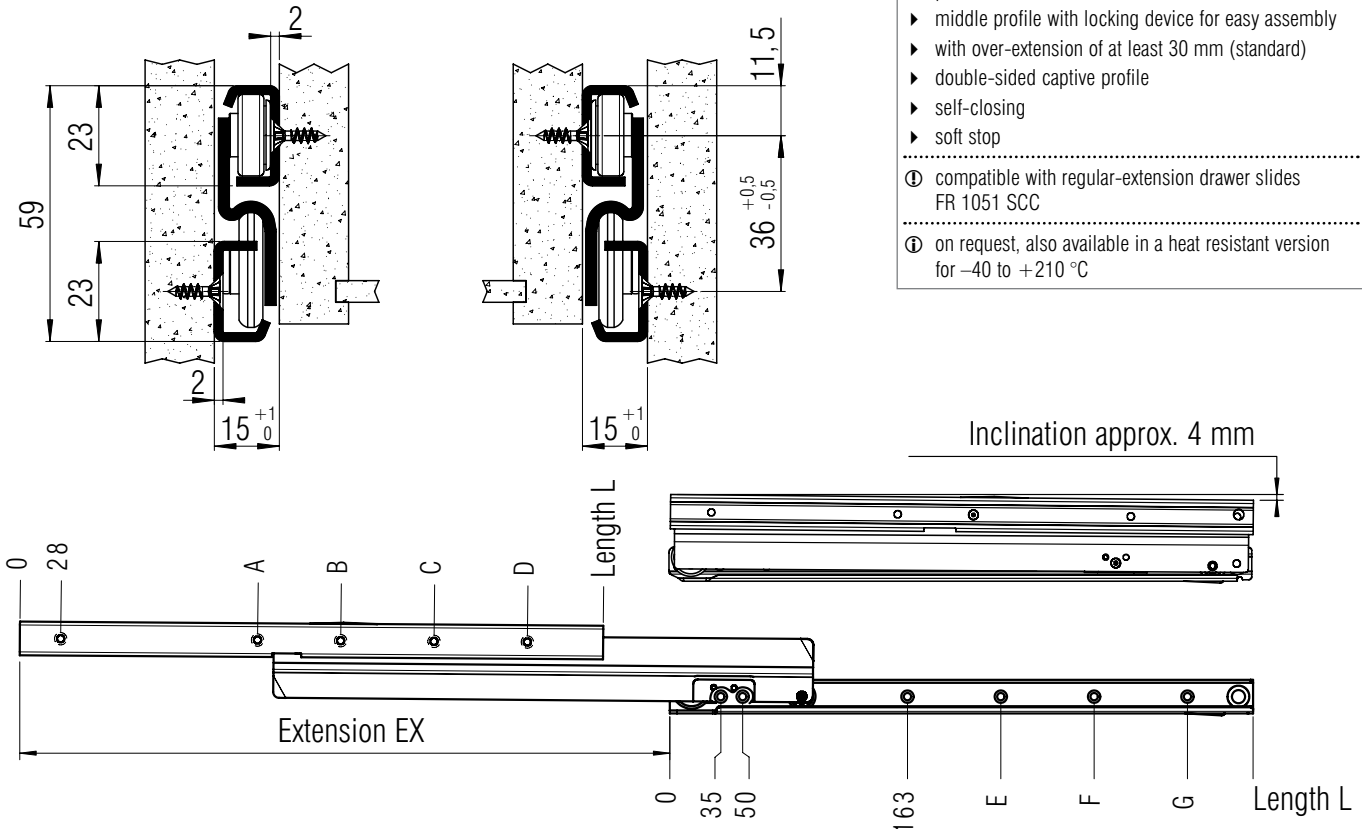

screw holes for 3,5 mm spax screws

L mm	EX mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight per pair (kg)	Order No. delrin rollers	Order No. heatresistant	Order No. steel ball bearings
300	320	124	284			259			1,52	*	*	▶ 1068
350	395	156	284			291			1,75	*	▶ 2521	▶ 1069
400	445	156	348			355			1,98	▶ 90214	▶ 2522	▶ 1070
450	495	156	348			355			2,19	▶ 90215	*	▶ 1071
500	545	156	348	444		355	451		2,42	▶ 90216	▶ 2524	▶ 1072
550	595	156	348	476		355	483		2,66	▶ 90217	▶ 2525	▶ 1073
600	645	156	348	540		355	547		2,89	▶ 90218	▶ 2526	▶ 1074
650	695	156	348	540		355	547		3,12	▶ 90219	*	▶ 1075
700	745	156	380	540	636	355	547	643	3,40	*	*	▶ 1076
750	795	156	348	540	636	355	547	643	3,58	*	*	▶ 1077

Packing Unit: 6 sets per box

▶ prompt delivery \* on request

**SLIDING**  
SYSTEMS

**Fulterer**